

400-HW SERIES

HOT FOOD DROP-IN WELL



ecosmart

 The gentle heating capability of HALO HEAT significantly extends hot food holding life without continuing the cooking process.

- Provides a more appealing product with better appearance and fresher taste.
- Front-of-the-house use with an existing counter, overhead lighting, and sneeze guard system or drop into a prep table for hot food plating convenience.
- Easy drop-in installation without the need of water or drainage connections and the related installation and water usage costs.
- Maintenance savings with the elimination of lime and scale buildup associated with steam table holding.
- Increase employee safety with the elimination of burning steam when changing pans.
- Adjustable thermostat with remote control suitable for mounting provides holding temperature flexibility without high steam table temperatures to scorch or burn.

A heated hot food well with an exterior of 18 gauge stainless steel. The hot well is controlled by two (2) adjustable thermostats with a range of 1 through 10. Thermostats include an ON/OFF control switch and indicator light. Each thermostat control is attached to the hot well base by a 30" (762mm) flexible and water tight tether.

The heated well base is available in two depths. The 4-3/8" (111mm) deep unit holds 4" (102mm) deep pans and the 6-3/8" (162mm) deep unit holds 6" (153mm) deep pans. Both units will hold a combination of standard (gastronorm) pan sizes. The hot well includes three (3) full-size pan divider bars and eight (8) half/third-size pan divider bars.

☐ MODEL 400-HW: 4-3/8" (111mm) depth, accepts four (4) full-size (gastronorm) pans

☐ MODEL 400-HW/ D6: 6-3/8" (162mm) depth, accepts four (4) full-size (gastronorm) pans







ADDITIONAL FEATURES & OPTIONS

Also available in 1, 3, 4, and 5 full-size pan capacities.

- Model 100-HW or 100-HW/ D6 One (1) full-size pan*, 12" x 20" x 2-1/2" GN 1/1
- Model 200-HW or 200-HW/ D6 Two (2) full-size pans*, 12" x 20" x 2-1/2" GN 1/1
- Model 300-HW or 300-HW/ D6 Three (3) full-size pans*, 12" x 20" x 2-1/2" GN 1/1
- Model 500-HW or 500-HW/ D6 Five (5) full-size pans*, 12" x 20" x 2-1/2" GN 1/1

*WILL ALSO ACCEPT 4" (100mm) DEEP PANS; D6 UNITS WILL ACCEPT 6" (153mm) DEEP PANS




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY



HOT FOOD DROP-IN WELL 400-HW SERIES

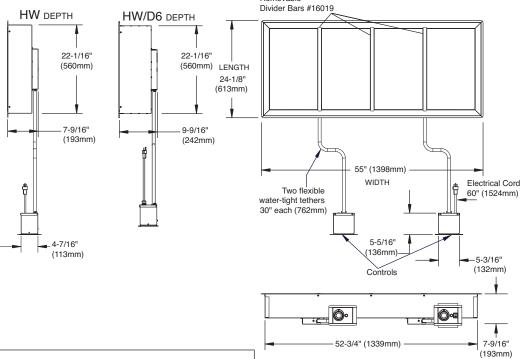

	ELECTRI	CAL				
	VOLTAGE	PHASE	CYCLE/ HZ	AMPS	kW	PLUG CONFIG.
	120	1	50/60	19.6	2.36	NEMA L5-30P
						30a-125v plug
240	at 208	1	50/60	8.5	1.77	NEMA 6-15 р
208-240	at 240	1	50/60	9.9	2.38	15a-250v plug
	230	1	50/60	9.5	2.19	bs 1363 plug
						(UK ONLY)

HW DIMENSIONS: $L \times W \times D$

EXTERIOR:

24-1/8" x 55" x 7-9/16" (613mm x 1398mm x 193mm) WELL DIMENSION:

22-1/16" x 52-3/4" x 4-3/8" (560mm x 1339mm x 111mm) COUNTER CUTOUT DIMENSION:

22-3/8" x 53" (568mm x 1346mm)

CONTROL BOX CUTOUT REOUIRED:

4-1/2" x 5-1/4" (115mm x 134mm)

HW/D6 DIMENSIONS: LxWxD

EXTERIOR:

24-1/8" x 55" x 9-9/16" (613mm x 1398mm x 243mm) WELL DIMENSION:

22-1/16" x 52-3/4" x 6-3/8" (560mm x 1339mm x 162mm) COUNTER CUTOUT DIMENSION:

22-3/8" x 53" (568mm x 1346mm)

CONTROL BOX CUTOUT REQUIRED:

4-1/2" x 5-1/4" (115mm x 134mm)

CLEARANCE REQUIREMENTS

4" (152mm) FROM BOTTOM

PRODU	CIAPAN	CAPACITY	
	48 lb (22	ko) maximiim	(BA

 $\mbox{kg})$ maximum (based on $4\mbox{"}$ deep pans) MAX. VOLUME: 30 qt (38 L) **FULL-SIZE PANS*:** Four (4) 12" x 20" x 2-1/2" GN 1/1 (325mm x 530mm x 65mm) Eight (8) 12" x 10" x 2-1/2" HALF-SIZE PANS*: GN 1/2 (325mm x 265mm x 65mm) THIRD-SIZE PANS*: Twelve (12) 12" x 6" x 2-1/2"

GN 1/3 (325mm x 176mm x 65mm) *WILL ALSO ACCEPT 4" (100mm) DEEP PANS; D6 UNITS WILL ACCEPT 6" (153mm) DEEP PANS

INSTALLATION REQUIREMENTS

Unit must be installed level and must not be installed in any area where it may be directly affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Hot well outer walls can reach 200° to 260°F (93° to 127°C). Verify countertop material temperature rating with manufacturer before installing hot well to ensure countertop can withstand heat.

WEIGHT EST.	400-HW	400-HW/ D6	
NET WEIGHT:	110 lb (50 kg)	115 lb (52 kg)	
SHIP WEIGHT:	142 lb (64 kg)	147 lb (66 kg)	
CRATE DIMENSIONS: (H x W x D)	19" x 62" x 31" (483mm x 1575mm x 787mm)		

OPTIONS & ACCESSORIES						
PAN DIVIDER BARS						
☐ Full-Size						
☐ Half-Size • Third-Size						



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY